


QWIK MOD 2 BLUE™

Better coverage with a wider optic—accomplish more with our NEW Qwik Mod™ Series.

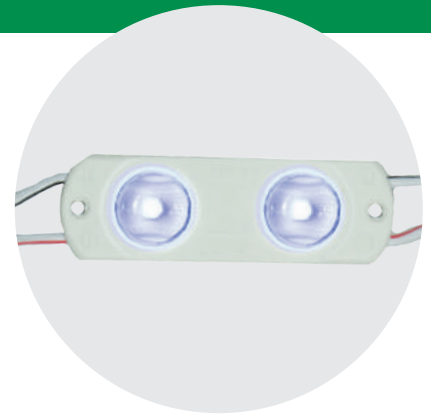

SPECIFICATIONS

Beam Angle	170° Ultra-Wide Low Dome Batwing Optic with Diamondback Optic Lens Technology
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs
Dimensions	0.69"W x 2.2"L x 0.25"H
Efficacy	See Product Options
Fastening	Peel & Stick / Mechanical Screw Hole
Input	12VDC
Intensity	See Product Options
Max Mods (Series)	See Product Options
Operating Temp	-25° to +60°C
Packaging	44.71 ft. (76 mods) per bag or 536.52 ft. (912 mods) per case
Power	See Product Options
Power Supply	P-LED 12VDC
Protection Grade	IP68
Run Footage	See Product Options
Spacing	1.7 mods/ft. (fully stretched)
Warranty	5 Year Product / 5 Year Limited Labor

FEATURES

- Diamondback 170° Optic Lens
- Integrated aluminum heatsink
- Snap & Peel Qwik Release Tab
- More light diffusion with a wider batwing resulting in better coverage

WIRING DETAILS

White/Red	Positive
White/Black	Negative

RECOMMENDED COVERAGE CHART

Depth	Max. Stroke	Row Spacing	Product
	Single Row	Multi-Rows O.C.	
3"	8"	4" at 3 mods/ft	QM2 Blue
4"	12"	7" at 2 mods/ft	QM2 Blue
5"	16"	10"	QM2 Blue
6"	18"	10"	QM2 Blue

Note: Product and depth may vary depending on face material and desired brightness.

PRODUCT OPTIONS

Color	Wavelength	Efficacy	Intensity	Power	Max. Mods (Series)	Run Footage	Part Number
Blue	460 nm	12.31 LM/W	10 LM/Mod (17 LM/FT)	0.8 W/MOD (1.36 W/FT)	22.35 ft (38 mods)	44.71ft (76 mods)	PL-QM2-BL17-P

