


# QWIK MOD 3 RED™

Better coverage with a wider optic—accomplish more with our NEW Qwik Mod™ Series.

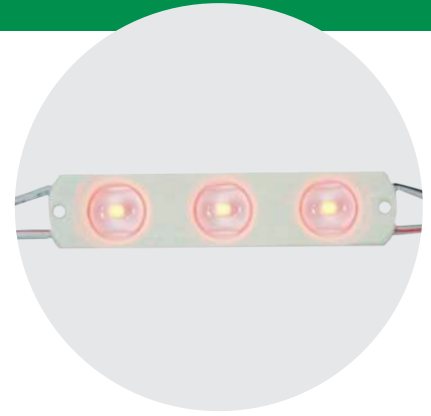

## SPECIFICATIONS

Beam Angle	170° Ultra-Wide Low Dome Batwing Optic with Diamondback Optic Lens Technology
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs
Dimensions	0.69"W x 3.14"L x 0.25"H
Efficacy	See Product Options
Fastening	Peel & Stick / Mechanical Screw Hole
Input	12VDC
Intensity	See Product Options
Max Mods (Series)	See Product Options
Operating Temp	-30° to +60°C
Packaging	33.3 ft. (50 mods) per bag or 500 ft. (750 mods) per case
Power	See Product Options
Power Supply	P-LED 12VDC
Protection Grade	IP68
Run Footage	See Product Options
Spacing	1.5 mods/ft. (fully stretched)
Warranty	5 Year Product / 5 Year Limited Labor

## FEATURES

- Diamondback 170° Optic Lens
- Integrated aluminum heatsink
- Snap & Peel Qwik Release Tab
- More light diffusion with a wider batwing resulting in better coverage
- Qwik Release Tab reduces labor time

## WIRING DETAILS

White/Red	Positive
White/Black	Negative

## RECOMMENDED COVERAGE CHART

Depth	Max. Stroke	Row Spacing		Product
		Single Row	Multi-Rows O.C.	
3"	8"	4" at 3 mods/ft	QM3 Red	
4"	12"	7" at 2 mods/ft	QM3 Red	
5"	16"	10"	QM3 Red	
6"	18"	12"	QM3 Red	
7"	22"	12"	QM3 Red	

Note: Product and depth may vary depending on face material and desired brightness.

## PRODUCT OPTIONS

Color	CCT	Efficacy	Intensity	Power	Max. Mods (Series)	Run Footage	Part Number
Red	625nm	28.33 LM/W	34 LM/Mod (51 LM/FT)	1.2 W/MOD (1.8 W/FT)	16.67 ft. (25 mods)	33.33 ft (50 mods)	PL-QM3-RD51-P

